




FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS & AUXILLARY WATERBALL

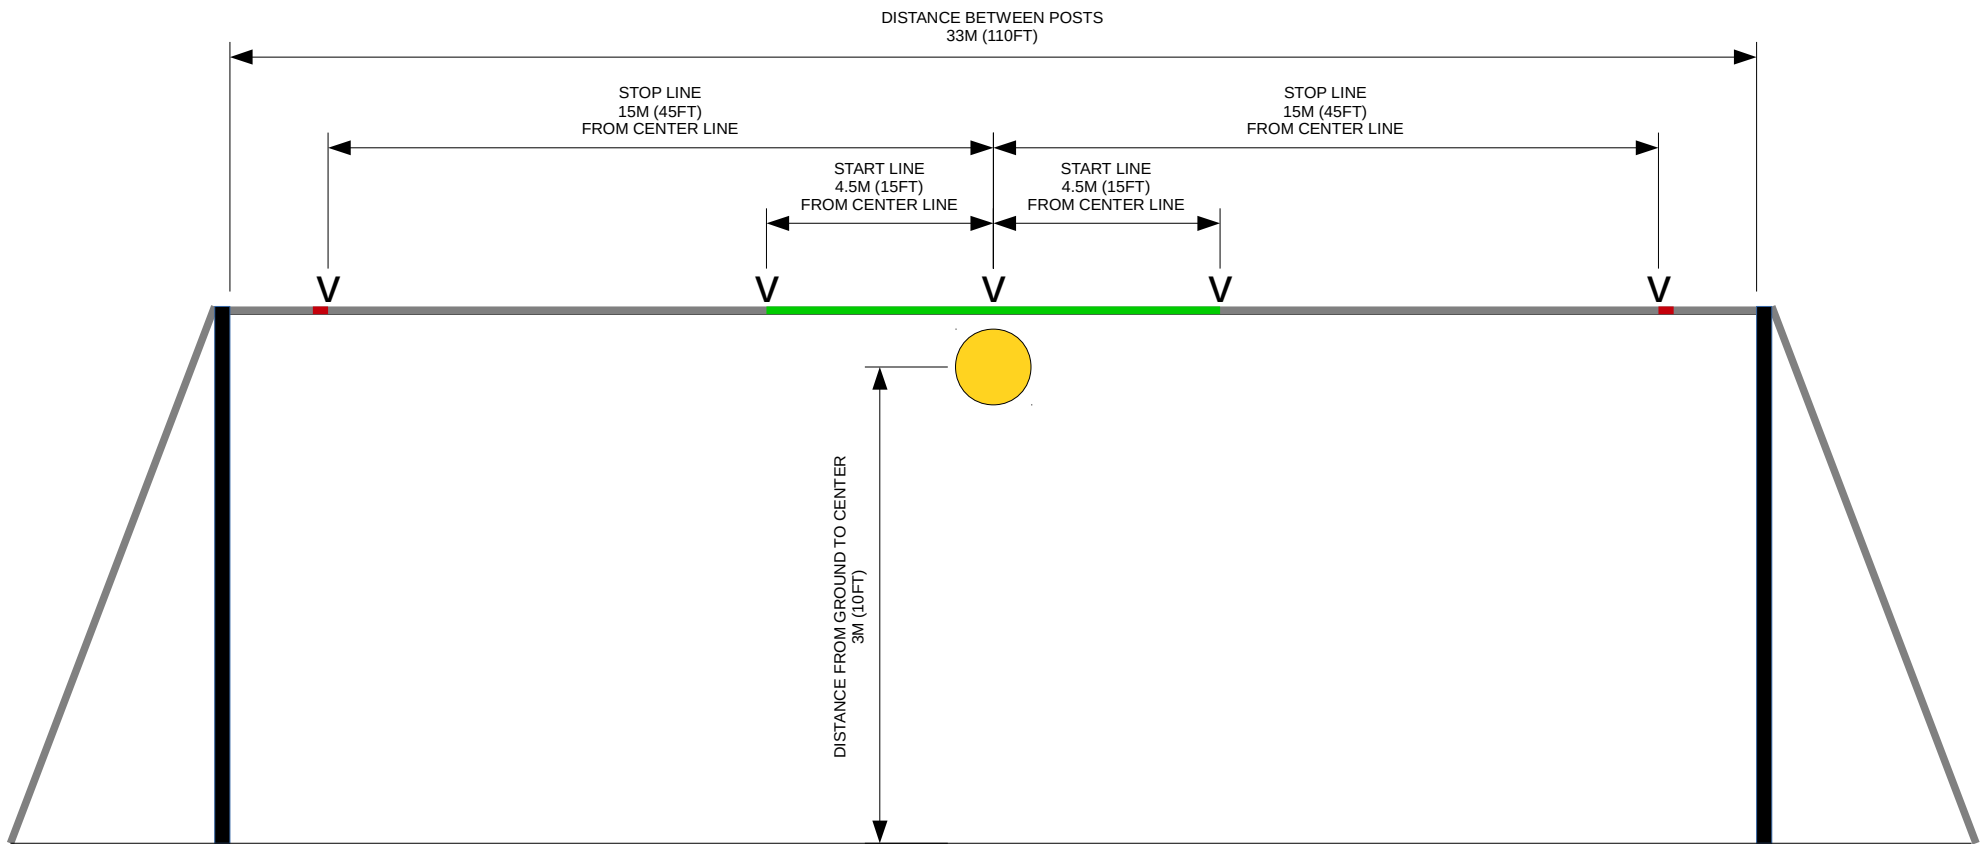

1.3.1. FIRE FIGHTERS' WATERBALL

1.3.1.1. Maximum number of competitors shall be five (5) plus one (1) coach.

1.3.1.2. Nozzle pressure shall be 630 KPA (90 PSI)

1.3.1.3. Time limit shall be three (3) minutes.

1.3.1.4. CLOTHING SHALL CONSIST OF:

1.3.1.4.(i) Approved Structural Firefighting Bunker Style Pants, Coat and Boots.

1.3.1.4.(ii) Head Protection – Approved Firefighting Helmet.

1.3.1.4.(iii) Gloves shall be optional.

1.3.1.4.(iv) Use of face shields shall be mandatory.

1.3.1.7. The starting line shall be 4.5 meters (15 ft.) each side of the center mark on the ground and/or the cable.

1.3.1.8. The winner of each heat shall advance to the next round.

1.3.1.9. The final round shall be the best two out of three.

1.3.1.10. The heat is won by advancing the ball against the stops in the opponent's territory.

1.3.1.11. In the event of time expiring, the winner shall be the team who has the ball in the opponent's territory when the whistle sounds.

1.3.1.12. The team may stand any distance behind the starting line at the beginning of the heat.

1.3.1.13. The nozzle men must cross streams over the ball before the signal to start is given.

1.3.1.14. After the signal to start, the teams may maneuver any place on the playing area.

1.3.1.15. Teams members may change positions any time during the competition.

1.3.1.16. DISQUALIFICATION SHALL OCCUR IF:

1.3.1.16.(i) The coach comes in contact with any player, the hose or the nozzle until after the final whistle is sounded.

1.3.1.16.(ii) The hose stream is directed at the opposing team.

1.3.1.16.(iii) The nozzle is dropped or thrown to the ground at any time during the competition.

1.3.1.16.(iv) In the opinion of the judges, the nozzle man loses control of the nozzle.

1.3.1.16.(v) There is any interference by a spectator.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.

.1.3.2. AUILIARY WATERBALL:

1.3.2.1. Maximum number of competitors shall be six (6) plus a coach.

1.3.2.2. Nozzle pressure shall be 525 KPA (75 PSI).

1.3.2.3. Time limit shall be two (2) minutes.

1.3.2.4. CLOTHING SHALL CONSIST OF:

1.3.2.4.(i) Long sleeved tops and long pants.

1.3.2.4.(ii) Head Protection – Approved Firefighting Helmet.

1.3.2.4.(iii) Full running style shoes with laces or Velcro fasteners done up. No sandals or open toed shoes.

1.3.2.4.(iv) Gloves shall be optional.

1.3.2.4.(v) Face shields shall be mandatory.

1.3.2.7. The starting line shall be 4.5 m (15 ft.) each side of center and marked on the ground and/or the cable.

1.3.2.8. The winner of each heat shall advance to the next round.

1.3.2.9. The final round shall be the best two out of three.

1.3.2.10. The heat is won by advancing the ball against the stops in the opponent's territory.

1.3.2.11. In the event of time expiring, the winner shall be the team who has the ball in the opponent's territory when the whistle sounds.

1.3.2.12. The team may stand any distance behind the starting line at the beginning of the heat.

1.3.2.13. The nozzle persons must cross streams above the ball before the signal to start is given.

1.3.2.14. After the signal to start, the teams may maneuver any place on the playing area.

1.3.2.15. Team members may change places at any time during the competition.

1.3.2.16. DISQUALIFICATION SHALL OCCUR IF:

1.3.2.16.(i) The coach comes in contact with any player, the hose, or the nozzle until after the final whistle is sounded.

1.3.2.16.(ii) The hose stream is directed at the opposing team.

1.3.2.16.(iii) The nozzle is dropped or thrown to the ground during the event.

1.3.2.16.(iv) In the opinion of the judges, the nozzle person loses control of the nozzle.


1.3.2.16.(v) There is any interference by a spectator.

1.3.2.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS & AUXILLARY BUCKET RACE

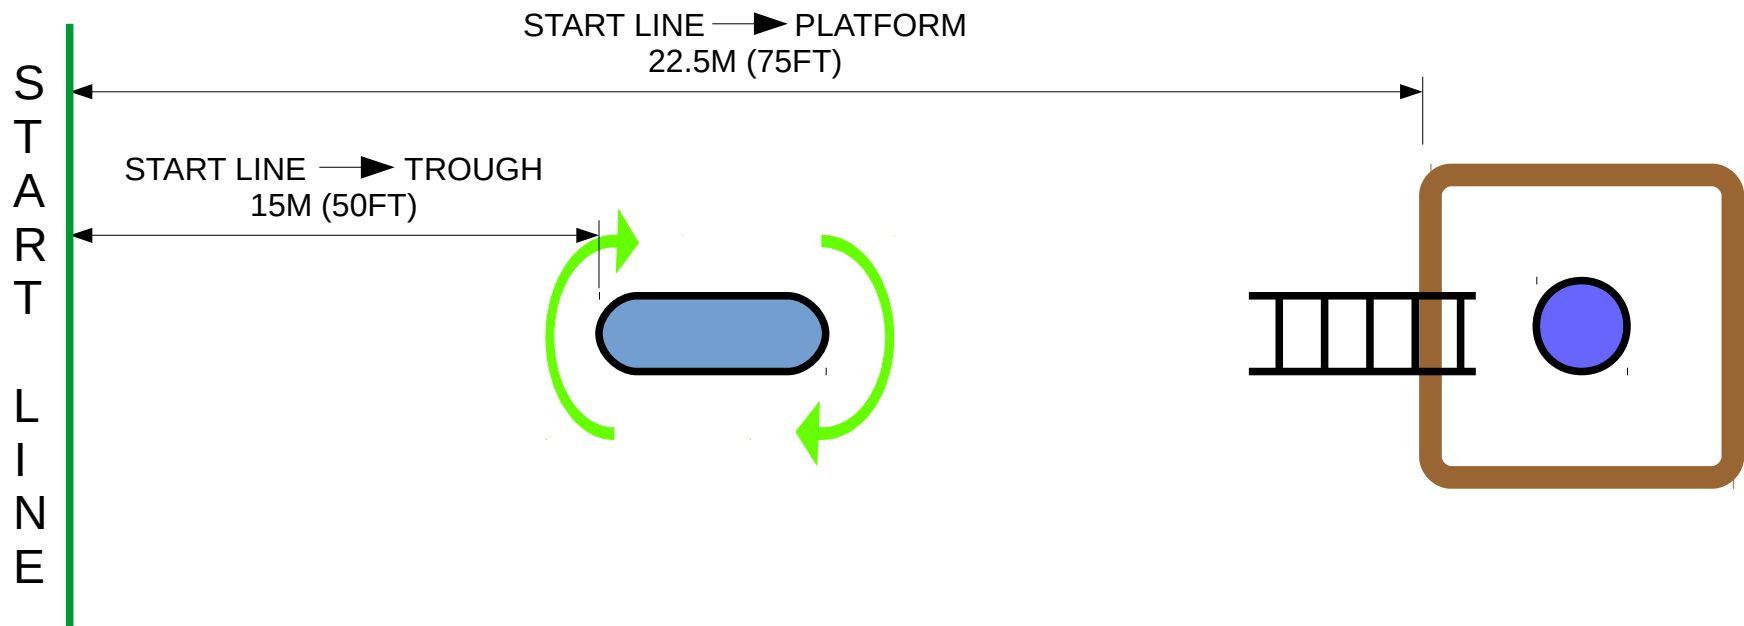

.1.3.4. FIRE FIGHTERS' BUCKET RACE:

1.3.4.1. Number of contestants shall be six (6).

1.3.4.2. CLOTHING SHALL CONSIST OF:

1.3.4.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.4.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.4.2.(iii) Gloves shall be optional.

1.3.4.2.(iv) Use of face shields shall be optional

.1.3.4.4. DISTANCES SHALL BE:

1.3.4.4.(i) Starting line – 22.5 m (75 ft.) from the base of the platform.

1.3.4.4.(ii) Trough – 15 m (75 ft.) from the starting line.

1.3.4.4.(iii) Empty buckets may be placed on either side of the trough, but must not extend past either end of the trough.

1.3.4.5. RUNNING THE EVENT:

1.3.4.5.(i) All contestants shall run from the starting line and circle the trough once, all travelling in the same direction.

1.3.4.5.(ii) This direction is to be maintained throughout the event.

1.3.4.5.(iii) The first competitor shall climb the ladder to the top of the platform.

1.3.4.5.(iv) The second competitor shall partially climb the ladder and apply a leg lock.

1.3.4.5.(v) The third competitor shall locate himself at the base of the ladder with one leg through a rung.

1.3.4.5.(vi) The remaining three (3) competitors shall circle the trough a second time, picking up and filling one bucket each, proceed to the base of the ladder and hand the bucket off to the ladder personnel, who will pass it up the ladder to be dumped into the barrel.

1.3.4.5.(vii) This shall be repeated until the barrel is filled.

1.3.4.6. The first three competitors shall not carry a bucket of water to the ladder.

1.3.4.7. If a bucket breaks, the judges will place another bucket into play at the trough.

1.3.4.8. A penalty of fifteen (15) seconds shall be incurred for every infraction of the rules.

1.3.4.9. The barrel is to be filled with water only. Any infraction shall result in the team being disqualified.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.

.1.3.5. AUXILIARY BUCKET RACE:

1.3.5.1. Number of contestants shall be six (6).

1.3.5.2. CLOTHING SHALL CONSIST OF:

1.3.5.2.(i) Long sleeved tops and long pants.

1.3.5.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.5.2.(iii) Full running style shoes with laces or Velcro fasteners done up. No sandals or open toed shoes.

1.3.5.2.(iv) Gloves shall be optional.

1.3.5.2.(v) Use of face shields shall be optional.

1.3.5.4. DISTANCES SHALL BE:

1.3.5.4.(i) Starting line – 22.5 m (75 ft.) from the base of the platform.

1.3.5.4.(ii) Trough – 15 m (50 ft.) from starting line.

1.3.5.4.(iii) Empty buckets may be placed on either side of the trough, but must not extend past either end of the trough.

1.3.5.5. RUNNING OF THE EVENT:

1.3.5.5.(i) All contestants shall run from the starting line and circle the trough once, all travelling in the same direction.

1.3.5.5.(ii) This direction shall be maintained throughout the event.

1.3.5.5.(iii) The first competitor shall climb the ladder to the top of the platform.

1.3.5.5.(iv) The second competitor shall partially climb the ladder and apply a leg lock.

1.3.5.5.(v) The third competitor shall locate themselves at the base of the ladder with one leg through a rung.

1.3.5.5.(vi) The remaining three competitors shall circle the trough a second time, picking up and filling a bucket each, proceed to the base of the ladder and hand off the bucket to the ladder personnel to be passed up to the platform and emptied into the barrel.

1.3.5.5.(vii) This shall be repeated until the barrel is full.

1.3.5.6. The first three competitors shall not carry a bucket of water to the ladder.

1.3.5.7. If a bucket breaks, the judges will place another bucket into play at the trough.

1.3.5.8. A penalty of fifteen (15) seconds shall be incurred for every infraction of the rules.


1.3.5.9. The barrel is to be filled with water only. Any infraction, the team will be disqualified.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS HOSE RACE

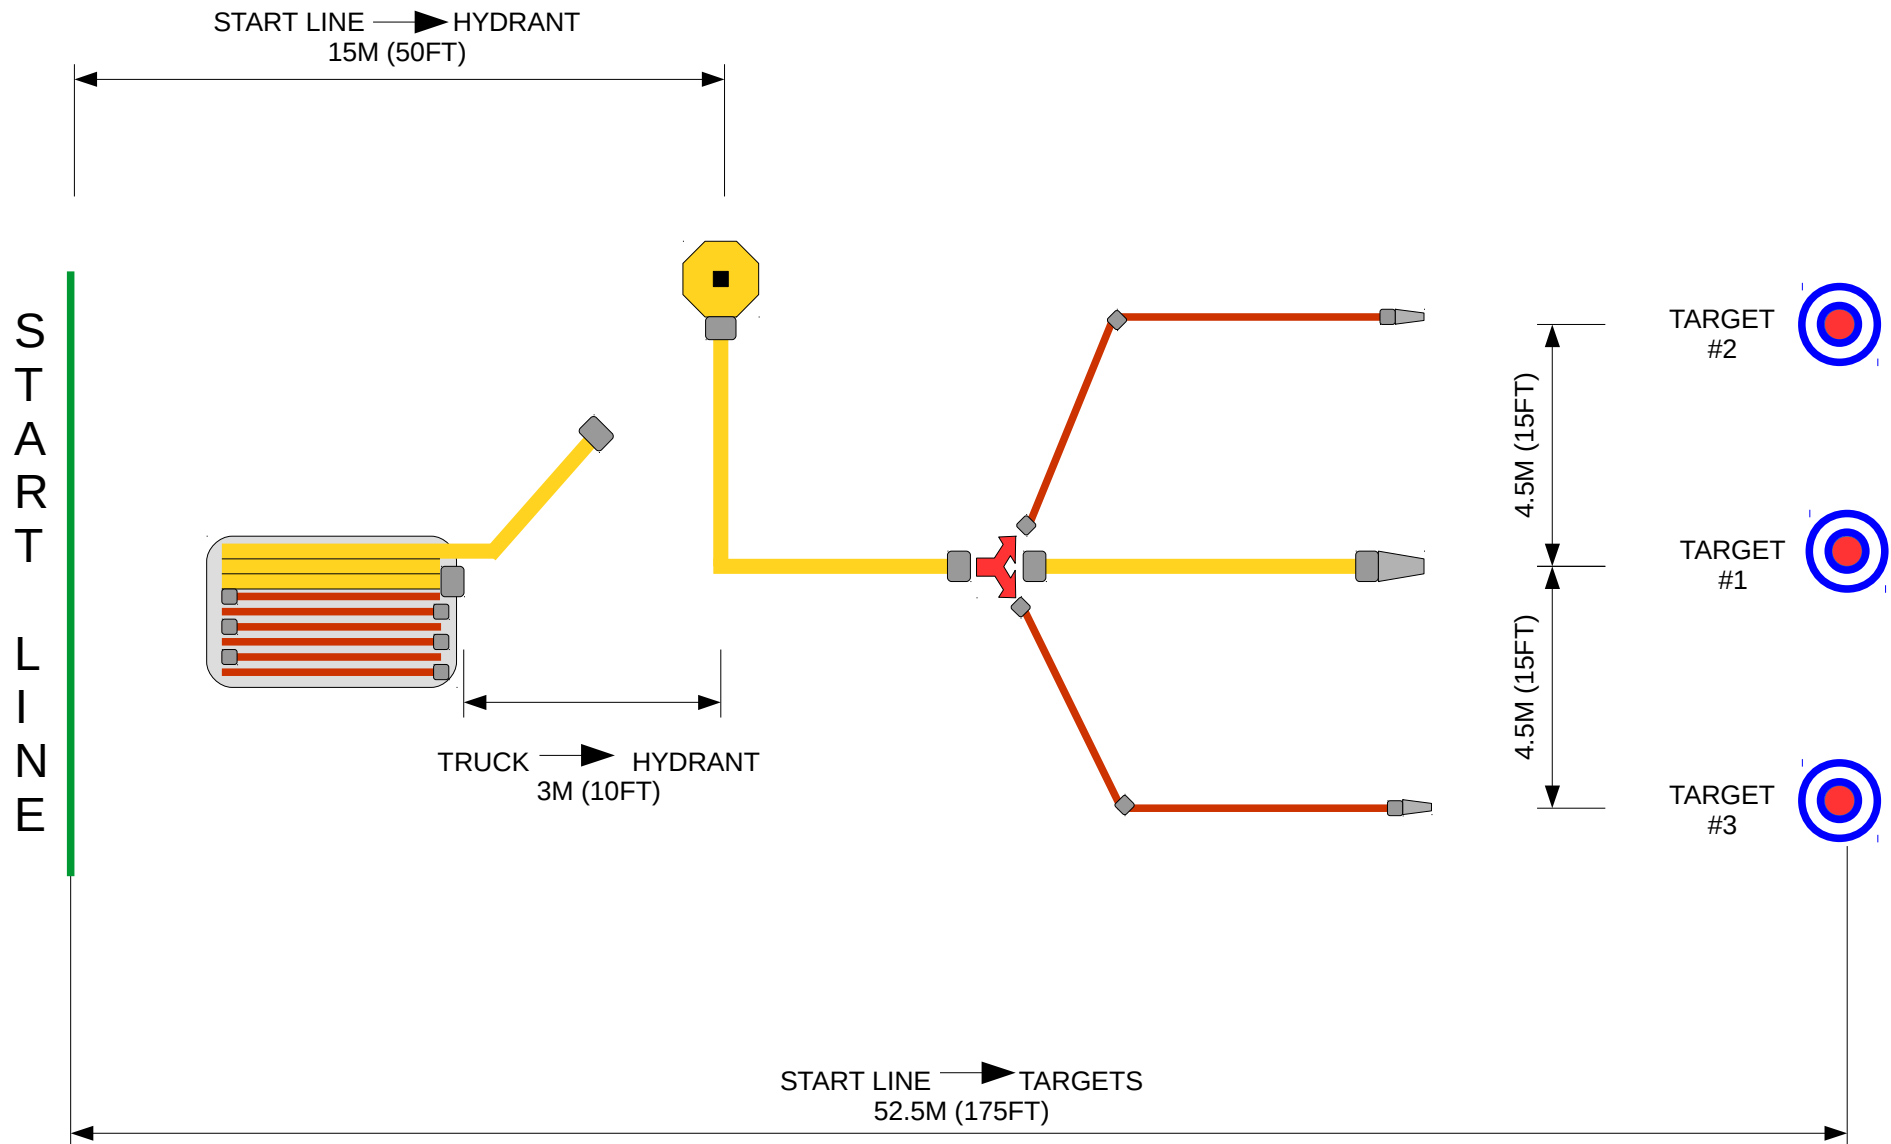

.1.3.7. HOSE RACE

1.3.7.1. Maximum number of competitors shall be eight (8)

1.3.7.2. CLOTHING SHALL CONSIST OF:

1.3.7.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.7.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.7.2.(iii) Gloves shall be optional.

1.3.7.2.(iv) Use of face shields shall be mandatory.

1.3.7.10. No coupling shall be left hanging over the side of the truck. Judges decision is final.

1.3.7.11. RUNNING OF THE EVENT:

1.3.7.11.(i) Hose load may be arranged any way the participating team wants.

1.3.7.11.(ii) Contestants shall run from the starting line to the truck, remove necessary equipment, and pull out 30m (100ft) of 65mm (2 ½ ") hose, disconnect coupling between second and third lengths, connect the line to the hydrant and knock down the centre target and shut off water.

1.3.7.11.(iii) Coupling between second and third lengths shall be clear of the truck tailgate before disconnecting.

1.3.7.11.(iv) Drop 65mm (2 ½ ") nozzle on ground, break connection between first and second lengths and install gated wye at end of second length.

1.3.7.11.(v) Connect 15m (50ft) of 38mm (1 ½ ") line to each side of gated wye.

1.3.7.11.(vi) Connect straight bore nozzles to ends of 38mm (1 ½ ") lines.

1.3.7.11.(vii) Turn on water and knock down remaining targets, one with each nozzle.

1.3.7.12. All contestants (except nozzle men) must stand clear of all couplings before targets are knocked down, and remain clear until final whistle is sounded.

1.3.7.13. Should it become necessary to return to a coupling that comes undone, time will continue to run.


1.3.7.14. Any infraction of the rules shall result in a fifteen (15) second penalty.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS LADDER RACE

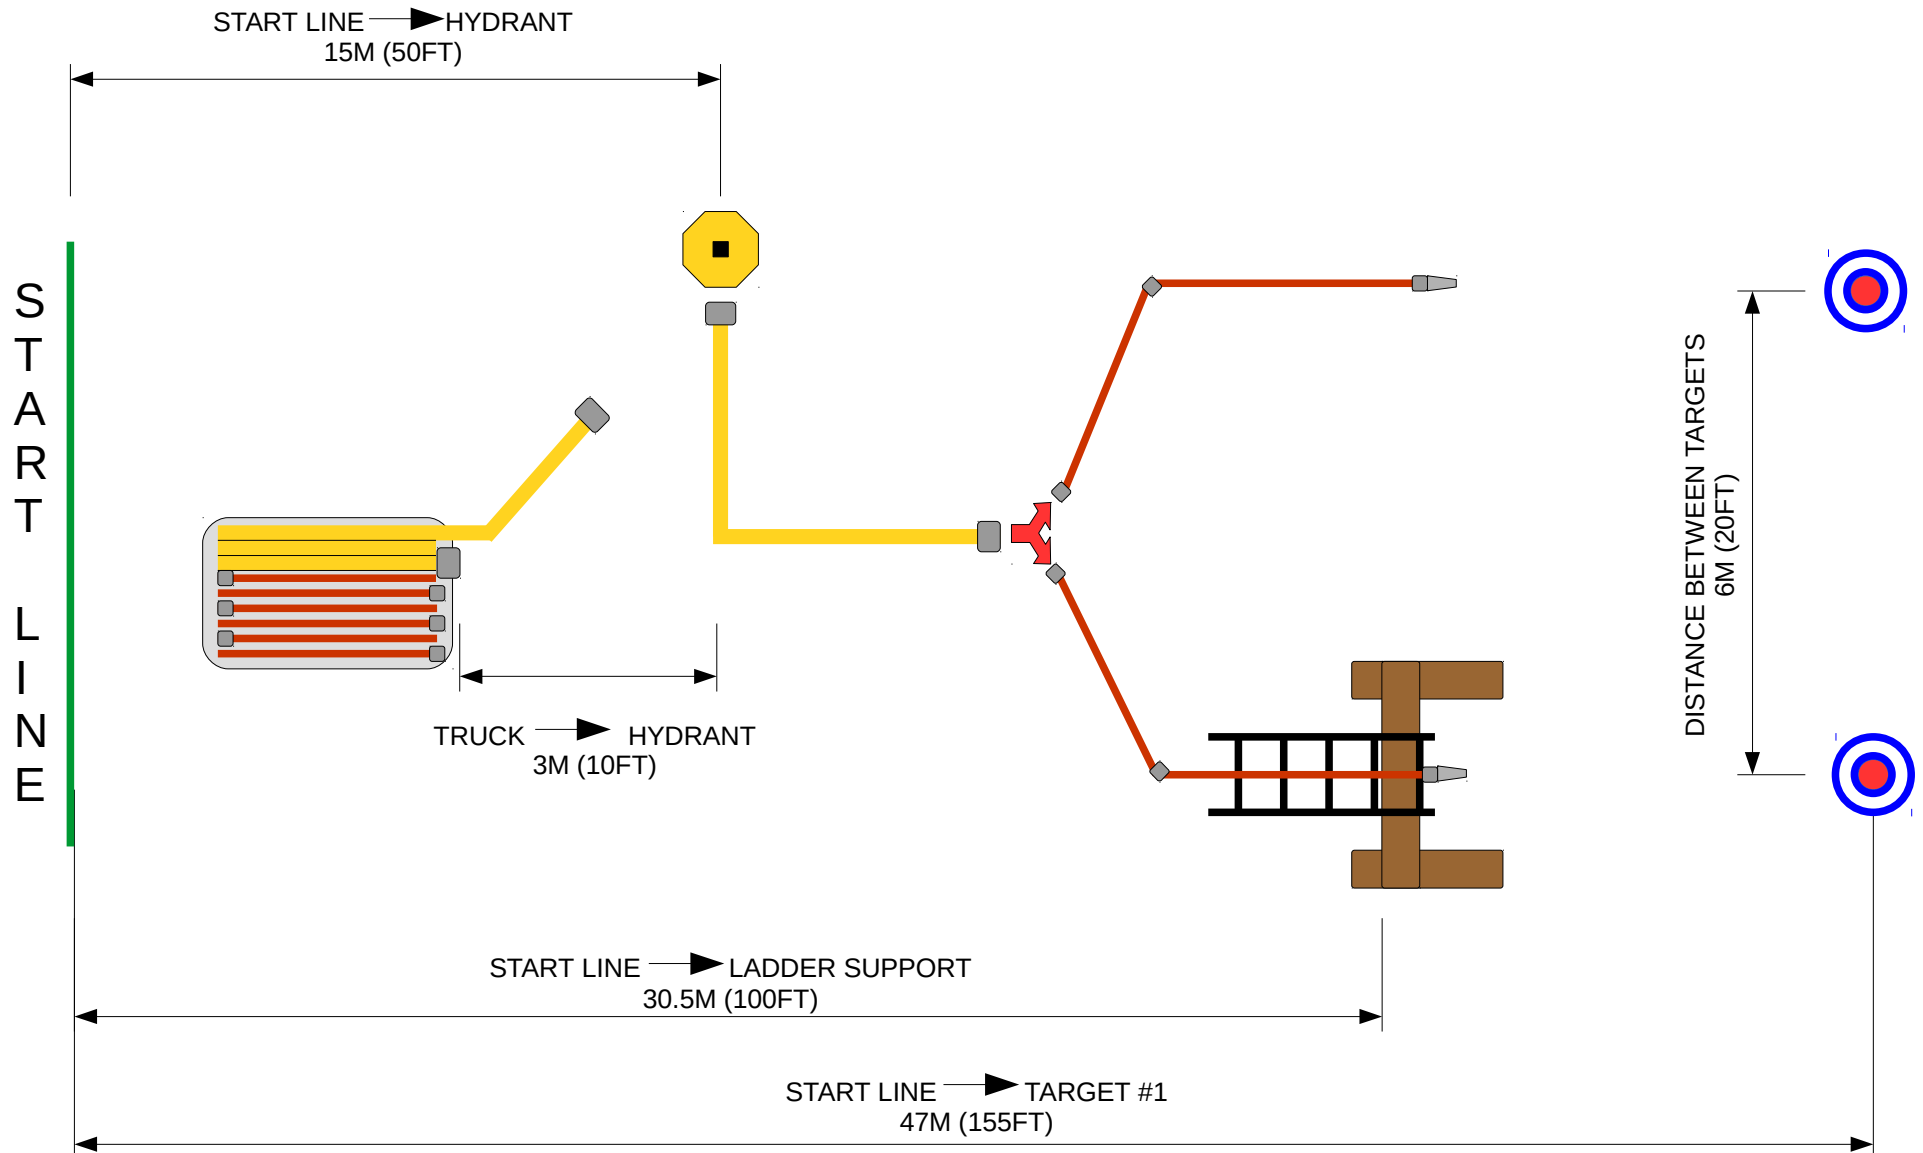

1.3.9. LADDER RACE:

1.3.9.1. Maximum number of contestants shall be eight (8).

1.3.9.2. CLOTHING SHALL CONSIST OF:

1.3.9.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.9.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.9.2.(iii) Gloves shall be optional.

1.3.9.2.(iv) Use of face shields shall be mandatory.

1.3.9.10. No coupling shall be left hanging over the side of the truck.

1.3.9.11. RUNNING THE EVENT:

1.3.9.11.(i) Hose load may be arranged any way the participating teams wants.

1.3.9.11.(ii) Contestants shall run from the starting line to the truck, remove the necessary equipment and pull out 15 m (50 ft) of 65 mm (2 ½ ") hose, disconnect the coupling between the first and second lengths, and connect line to hydrant.

1.3.9.11.(iii) Coupling between the first and second lengths shall be clear of the truck before disconnecting.

1.3.9.11.(iv) Connect the gated wye to the end of the 65 mm (2 ½ ") line.

1.3.9.11.(v) Connect a 15 m (50 ft) length of 38 mm (1 ½ ") hose to each side of the gated wye.

1.3.9.11.(vi) Connect the straight bore nozzles to the ends of the 38 mm (1 ½ ") lines.

1.3.9.11.(vii) Carry ladder and raise to the ladder support.

1.3.9.11.(viii) Carry nozzles up ladder, position one above the ladder support and one under the ladder support and assume a leg lock.

1.3.9.11.(ix) Turn on the water and knock down each target with a different nozzle.

1.3.9.12. All contestants (except nozzle man) shall stand clear of all couplings before targets are knocked down and shall remain clear until the final whistle is sounded.

1.3.9.13. Should it become necessary to return to a coupling that has come undone, time will continue to run.


1.3.9.14. Any infraction of the rules shall result in a fifteen (15) second penalty.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS RESCUE RACE

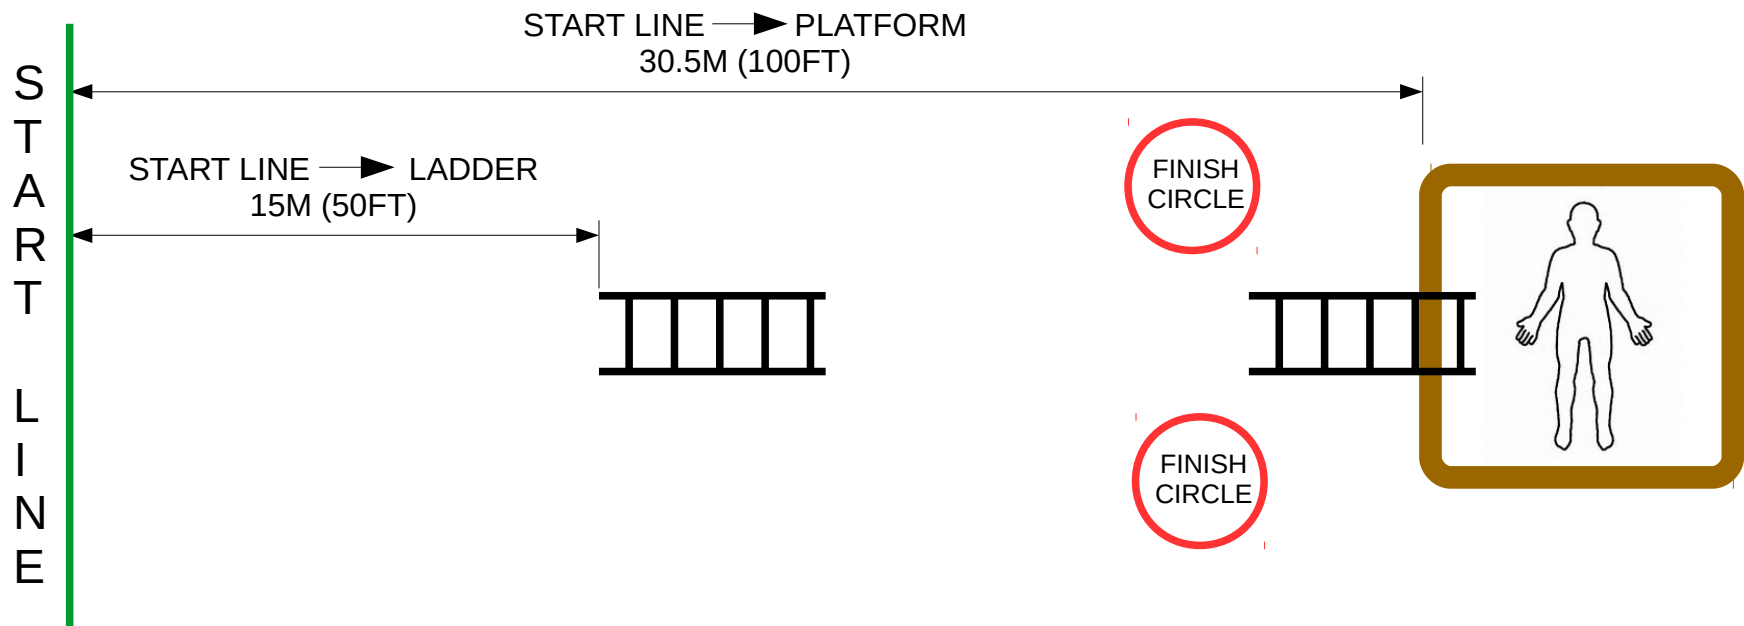

1.3.11. RESCUE RACE:

1.3.11.1. Maximum number of contestants shall be six (6).

1.3.11.2. CLOTHING SHALL CONSIST OF:

1.3.11.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.11.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.11.2.(iii) Gloves shall be optional.

1.3.11.2.(iv) Use of face shields shall be optional.

1.3.11.7. RUNNING OF THE EVENT SHALL BE AS FOLLOWS:

1.3.11.7.(i) Contestants shall run to the ladder.

1.3.11.7.(ii) Contestants shall carry the ladder to the platform and raise same.

1.3.11.7.(iii) First contestant shall climb to the platform using all rungs with both hands and feet, the first hand to touch a rung shall be no higher than chest height, steady ladder but not touch the dummy.

1.3.11.7.(iv) Second contestant shall climb the ladder to the platform and pick up the dummy using recognized fire fighter lift.

1.3.11.7.(v) Second contestant shall carry dummy to the ground.

1.3.11.7.(vi) Second contestant shall step to the right or left, placing both feet inside a circle before dropping dummy to the ground.

1.3.11.8. Rescuer may use the beam of the ladder for free hand during decent.

1.3.11.9.(i) Rescuer must use all ladder rungs with both feet and hands while climbing.

1.3.11.9.(ii) First hand to touch a rung must be no higher than chest height.

1.3.11.10. Rescuer must use all ladder rungs with both feet when descending.


1.3.11.11. Any infraction of the rules shall result in a fifteen (15) second penalty.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS HOSE REPLACEMENT RACE

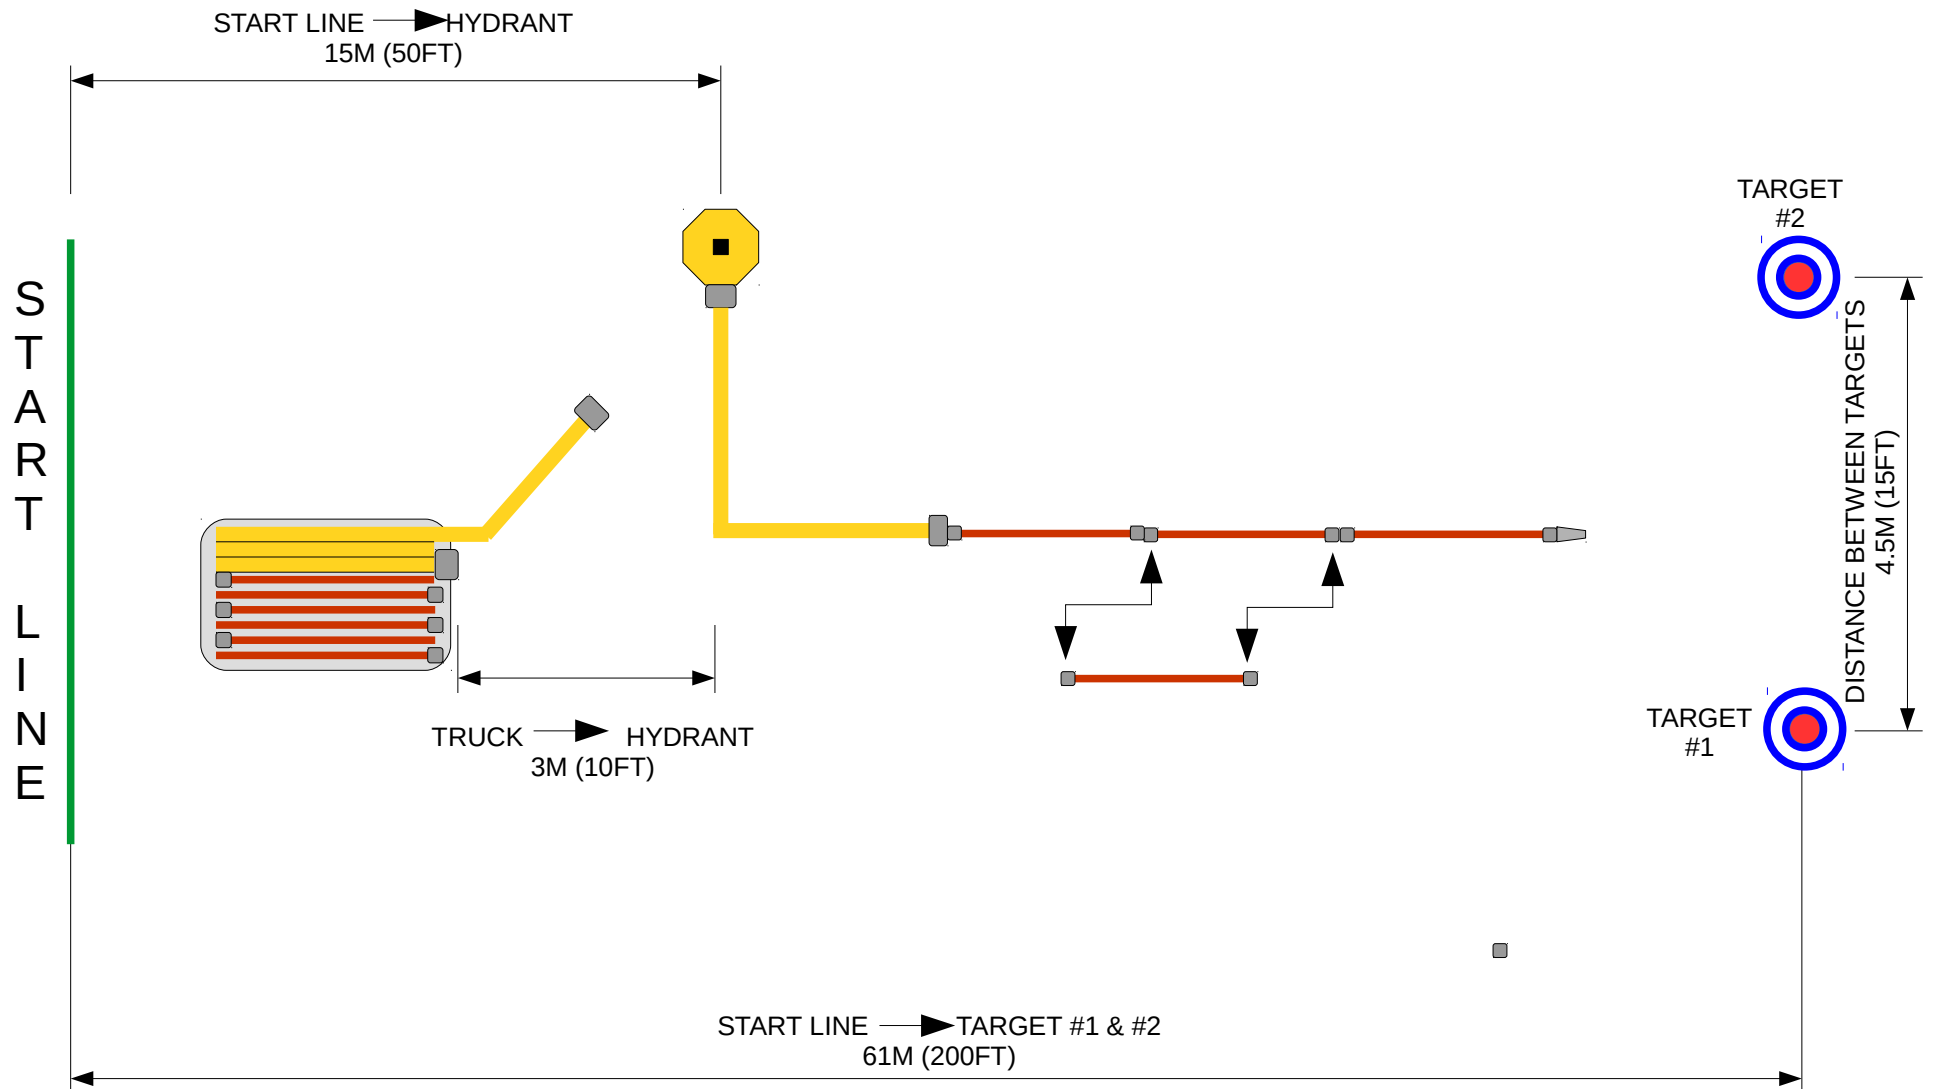

1.3.12. HOSE REPLACEMENT RACE:

1.3.12.1. Maximum number of competitors shall be four (4).

1.3.12.2. CLOTHING SHALL CONSIST OF:

1.3.12.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.12.2.(ii) Head Protection – Approved Firefighting Helmet.

1.3.12.2.(iii) Gloves shall be optional.

1.3.12.2.(iv) Use of face shields shall be mandatory.

1.3.12.10. No coupling shall be left hanging over the side of the truck.

1.3.12.11. RUNNING OF THE EVENT:

1.3.12.11.(i) Hose may be arranged any way the participating team wants.

1.3.12.11.(ii) Contestants shall run from the starting line to the truck, remove necessary equipment, and pull out 45m (150 ft.) of hose, disconnect coupling between third and fourth lengths, connect the hose to the hydrant and knock down one target and shut off water.

1.3.12.11.(iii) Coupling between third and fourth lengths shall be clear of the truck before disconnecting.

1.3.12.11.(iv) Remove the second length and replace with one length off the truck.

1.3.12.11.(v) Turn on water and knock down remaining target.

1.3.12.12. All contestants (except nozzle man) must stand clear of all couplings before target is knocked down, and shall remain clear until the final whistle is sounded.

1.3.12.13. Should it become necessary to return to a coupling that has come undone, time will continue to run.

1.3.12.14. Any infraction of the rules shall result in a fifteen (15) second penalty.

1.3.12.15. Spare hose may not leave the truck until the first coupling is broken



1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTERS OPEN 100M RACE & CHIEFS OPEN 50M RACE

100M (300FT)

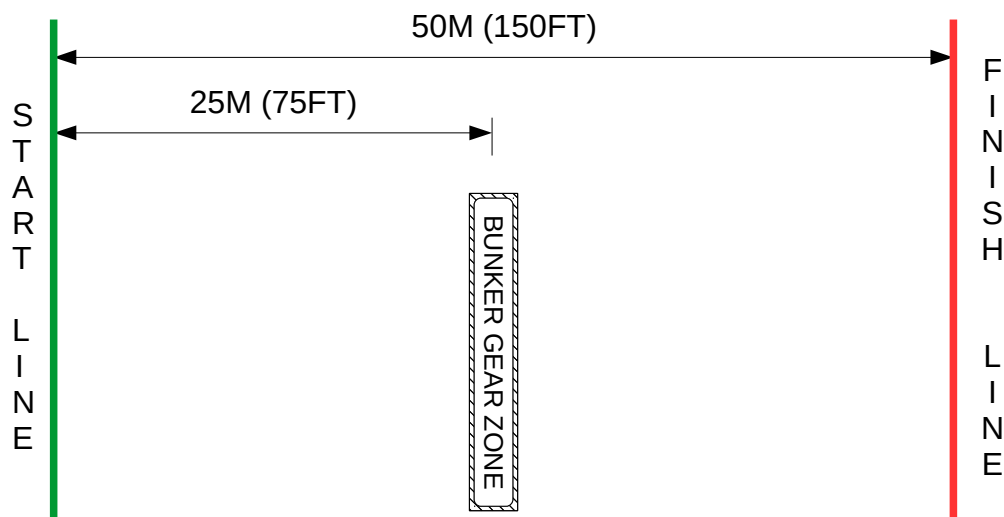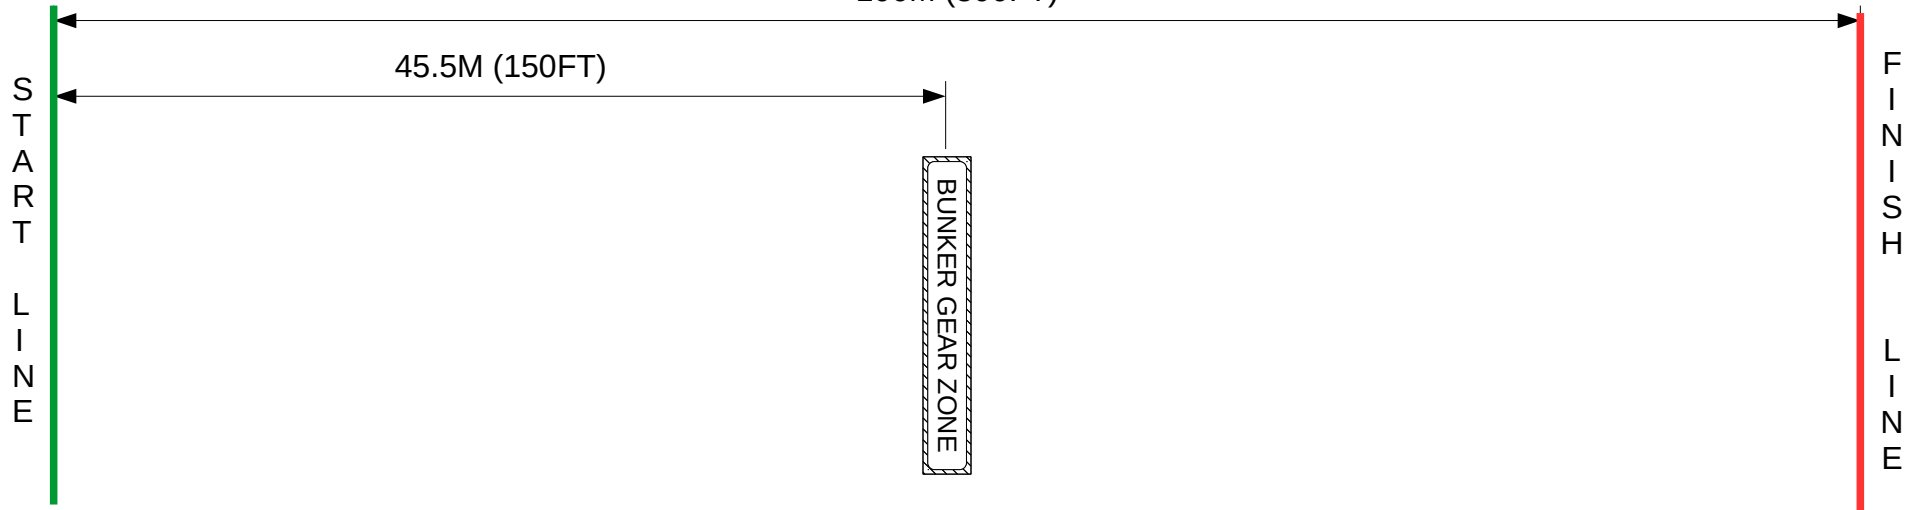

1.3.14 FIREFIGHTERS OPEN – 100 METRES

1.3.14.1. Open to all firefighters.(active & retired)

1.3.14.2. CLOTHING SHALL CONSIST OF:

1.3.11.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.11.2.(ii) Head Protection – Approved Firefighting Helmet.

1.4.4.2.(iii) Gloves shall be mandatory.

1.3.11.2.(iv) Use of face shields shall be optional.

1.3.14.3. Disqualification shall occur if a competitor wears spikes of any kind.

1.3.15. CHIEFS OPEN – 50 METRES

1.3.15.1. Open to all chiefs.(active & retired)

1.3.14.2. CLOTHING SHALL CONSIST OF:

1.3.11.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.3.11.2.(ii) Head Protection – Approved Firefighting Helmet.

1.4.4.2.(iii) Gloves shall be mandatory.


1.3.11.2.(iv) Use of face shields shall be optional.

1.3.14.3. Disqualification shall occur if a competitor wears spikes of any kind.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT CREW EFFICIENCY RACE

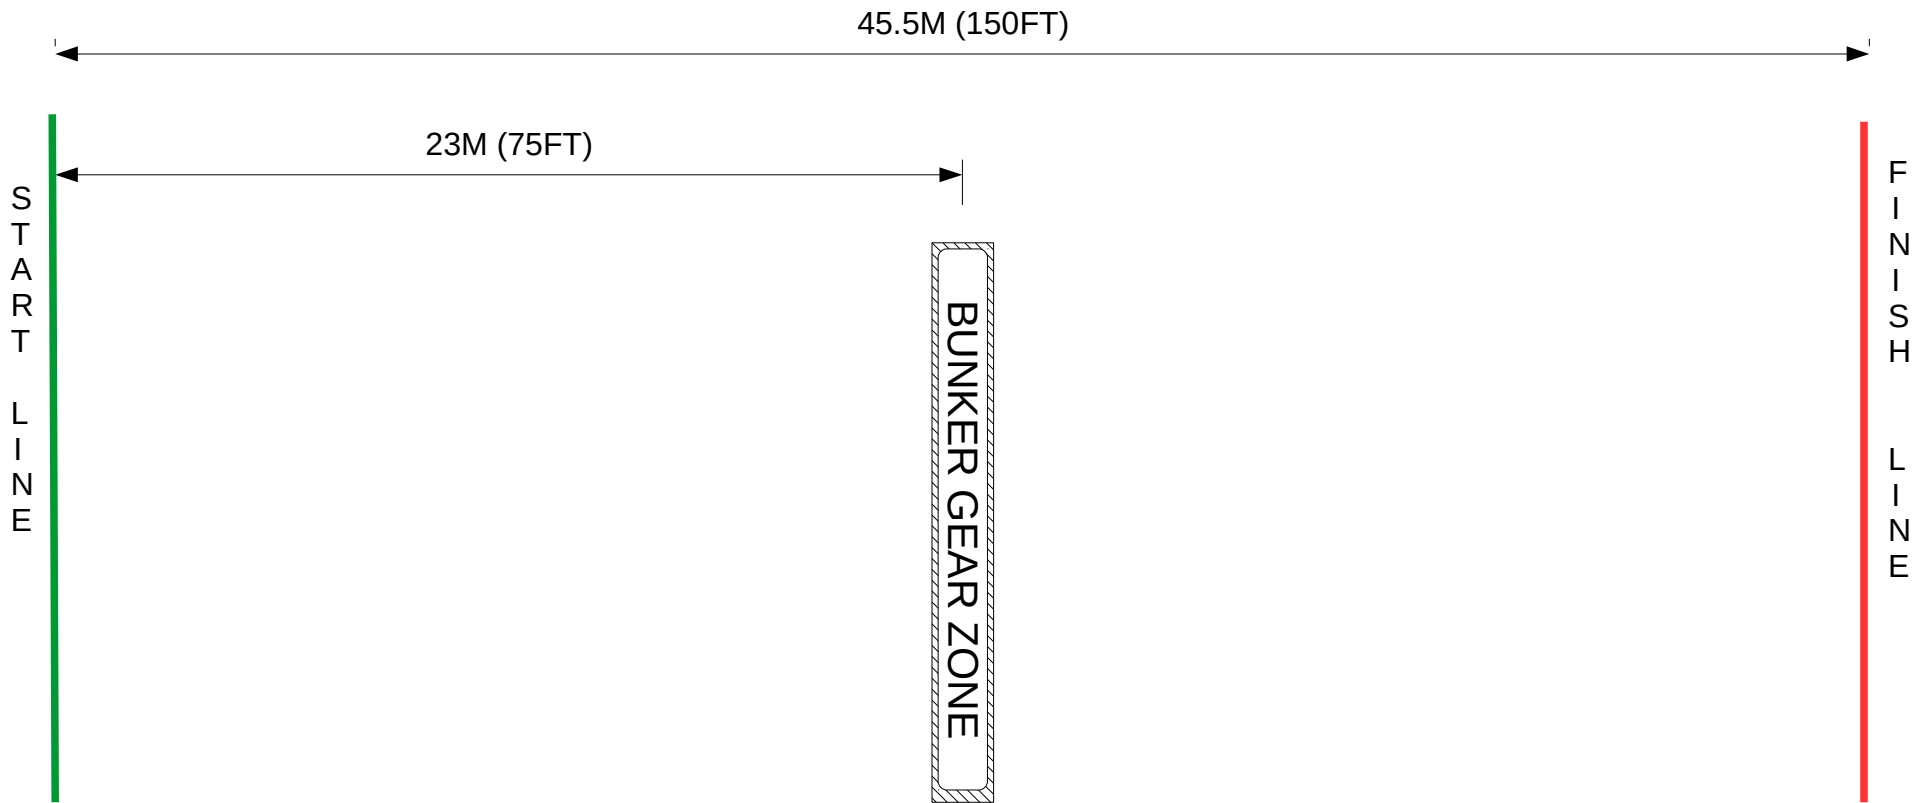

1.4.4. CREW EFFICIENCY

1.4.4.1. Number of contestants shall be five (5).

1.4.4.2. CLOTHING SHALL CONSIST OF:

1.4.4.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.4.4.2.(ii) Approved Firefighting Helmet.

1.4.4.2.(iii) Gloves shall be mandatory.

1.4.4.2.(iv) Use of face shields shall be optional.

1.4.4.3. Equipment shall be placed on the ground 5m (15 ft) from the start line.

1.4.4.4. Finish line shall be 30m (100 ft) from the equipment.


1.4.4.5. Team members shall stand at the start line with shoes on.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO


FIELD LAYOUT FAST WATER (NON - MOTORIZED) RACE STEAMER

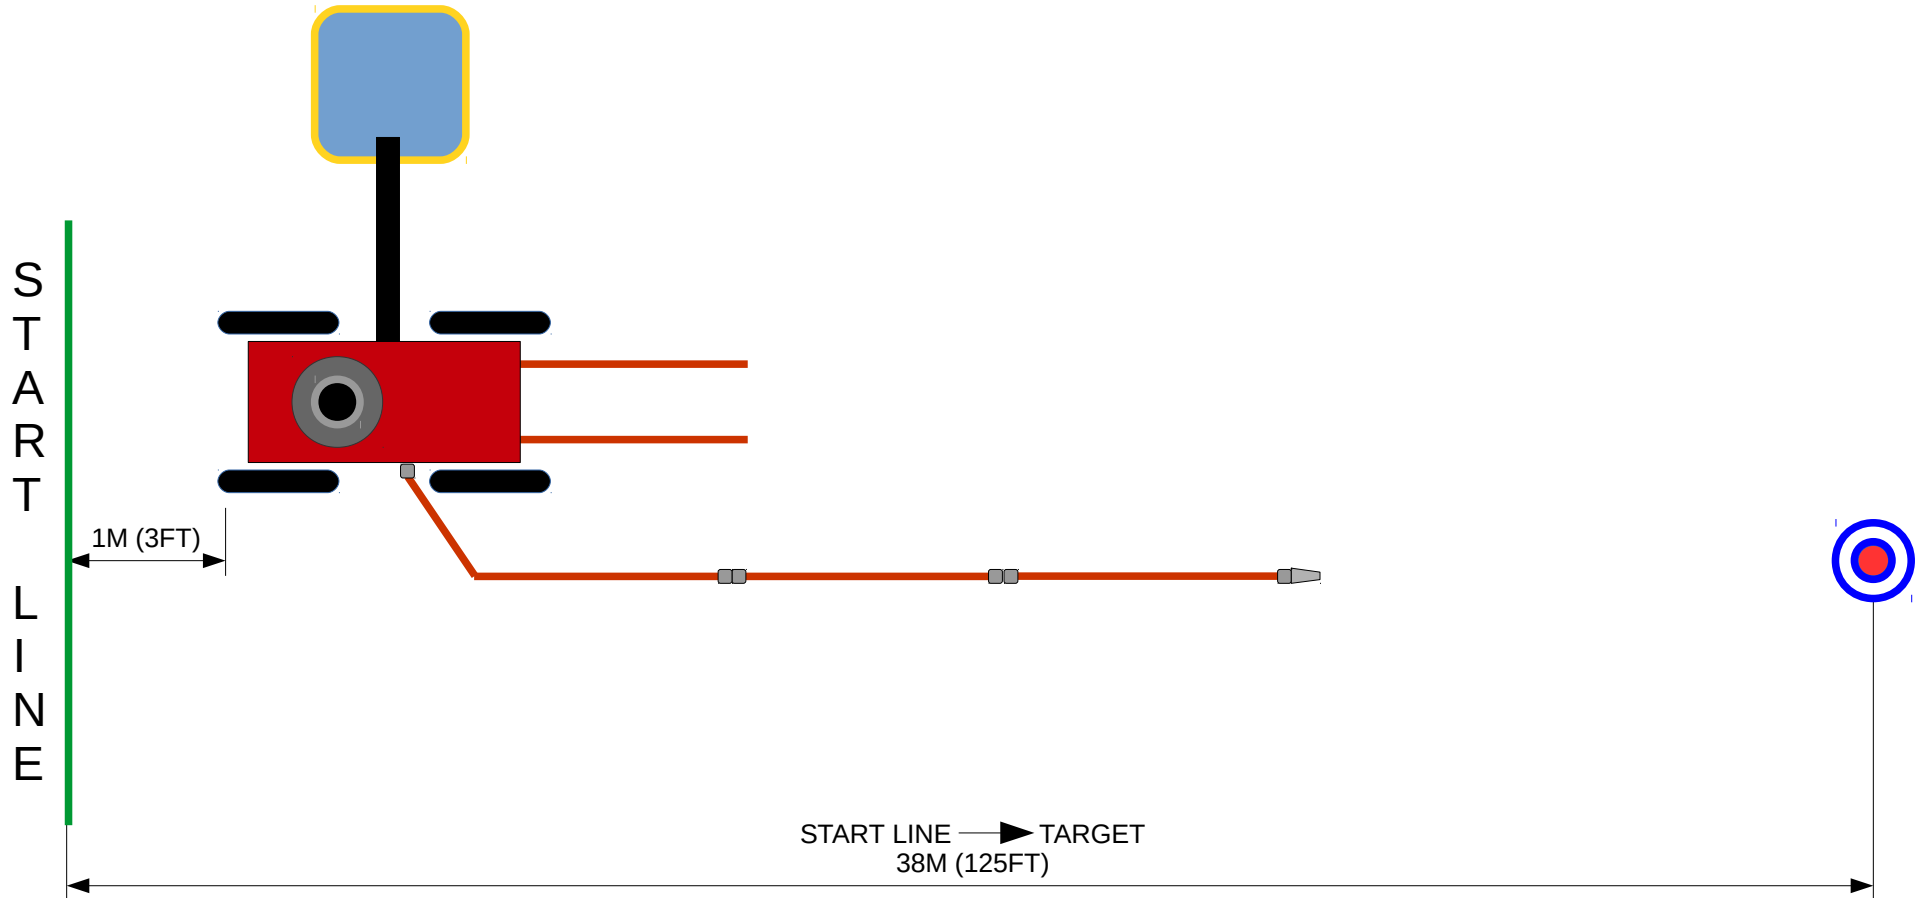



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FAST WATER (NON - MOTORIZED) RACE HAND OPERATED

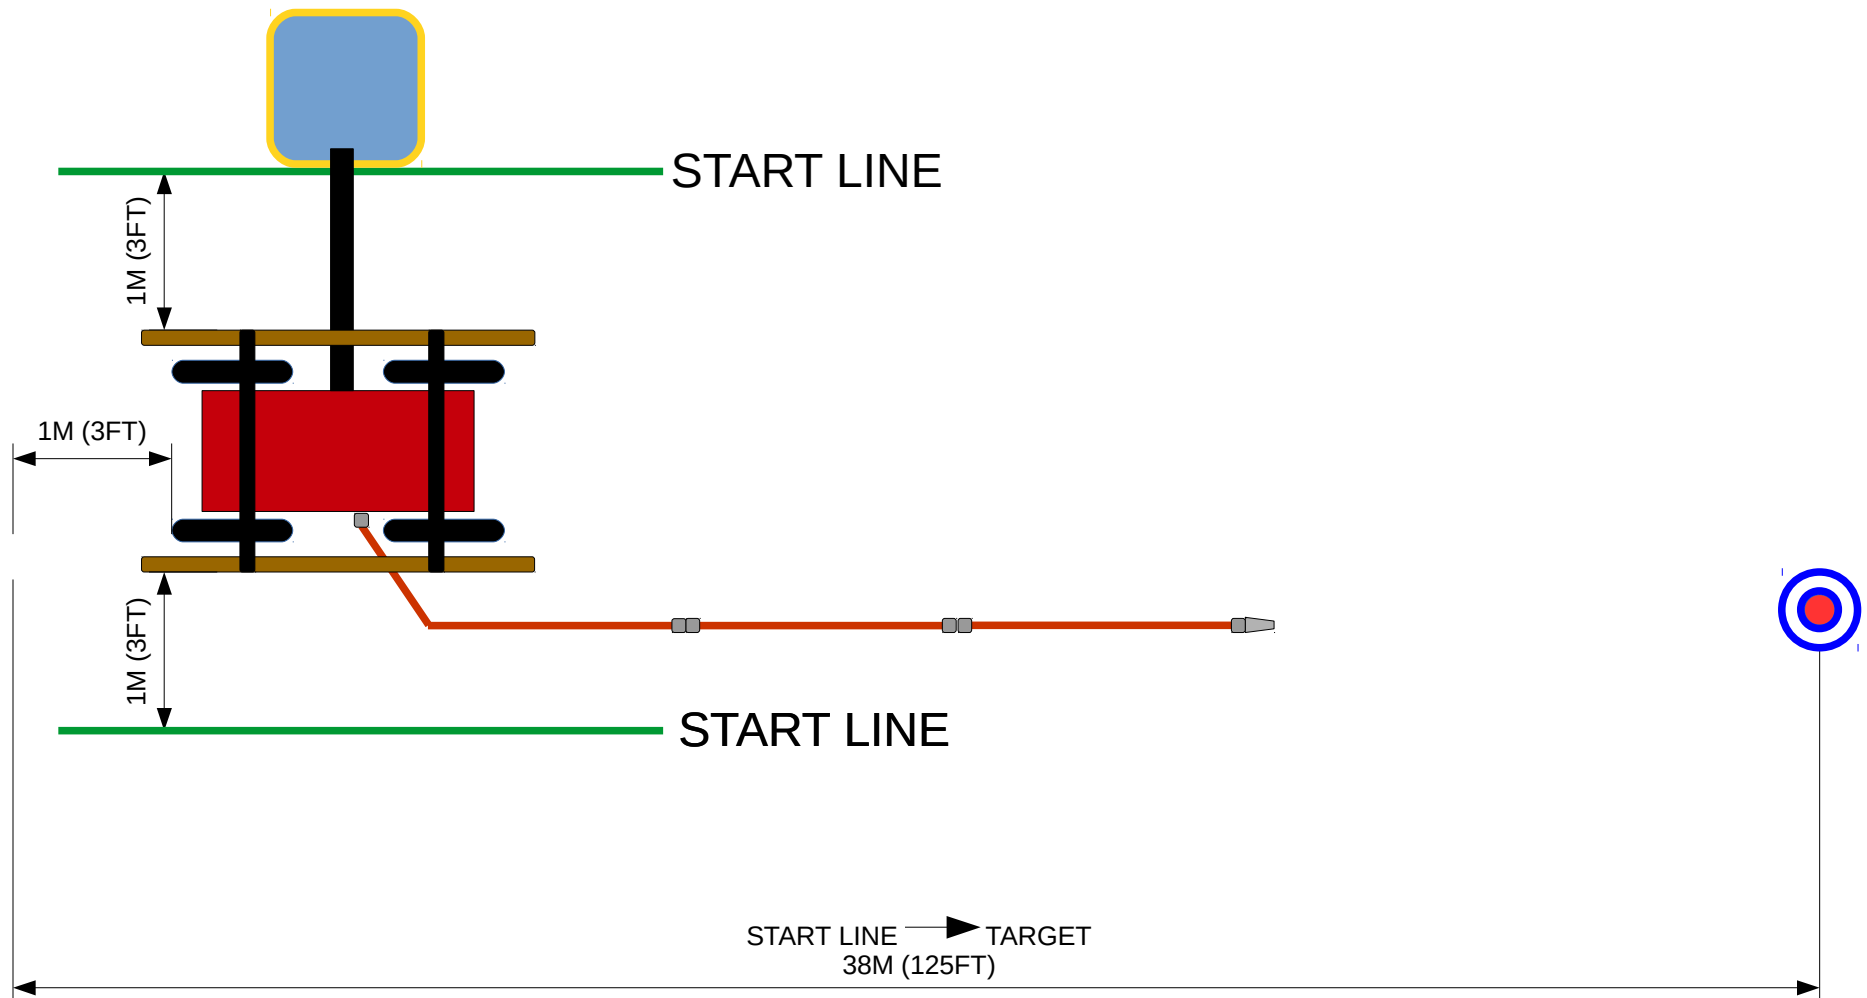

1.4.3. FAST WATER PUMPING – NON MOTORIZED

1.4.3.1. Each apparatus shall be tested individually against a stop watch.

1.4.3.2. CLASSIFICATION OF APPARATUS SHALL BE AS FOLLOWS:

1.4.3.2.(i) Steam operated

1.4.3.2.(ii) Hand operated

1.4.3.3. MAXIMUM NUMBER OF CONTESTANTS SHALL BE:

1.4.3.3.(i) Steam operated – five (5)

1.4.3.3.(ii) Hand operated – twelve (12)

1.4.3.4. CLOTHING SHALL CONSIST OF:

1.4.3.4.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.4.3.4.(ii) Head Protection – Approved Firefighting Helmet.

1.4.3.4.(iii) Gloves shall be optional

1.4.3.4.(iv) Use of face shields shall be optional

1.4.3.5. EQUIPMENT SHALL CONSIST OF:

1.4.3.5.(i) Hard suction hose as provided on the original equipment.

1.4.3.6. Apparatus to be located at water source with hard suction connected and in the water source.

1.4.3.7. Pump, suction and discharge to be drained and checked by judges.

1.4.3.8. RUNNING OF THE EVENT:

1.4.3.8.(i) Contestants shall have pump disengaged.

1.4.3.8.(ii) Contestants shall be placed as follows:

1.4.3.8.(ii)(a) Steam operated – all crew lined up at rear of wagon.

1.4.3.8.(ii)(b) Hand operated – Crew members to stand back one metre (1m) from the side of the wagon with both hands at their sides.

1.4.3.8.(iii) At the signal, engage pump, prime pump and flow water

1.4.3.8.(iv) Knock down the target.

1.4.3.9. Time shall run from the signal to start until the target is knocked down.

1.4.3.10. Each team shall be given a second chance if they wish, but the best time will be used.

1.4.3.11. A penalty of five (5) seconds shall be assessed for each of the following infractions:

1.4.3.11.(i) Contestants not standing where specified.

1.4.3.11.(ii) Turnout gear not fastened properly.


1.4.3.11.(iii) Target not knocked down within two minutes of start signal.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FAST WATER (MOTORIZED) RACE

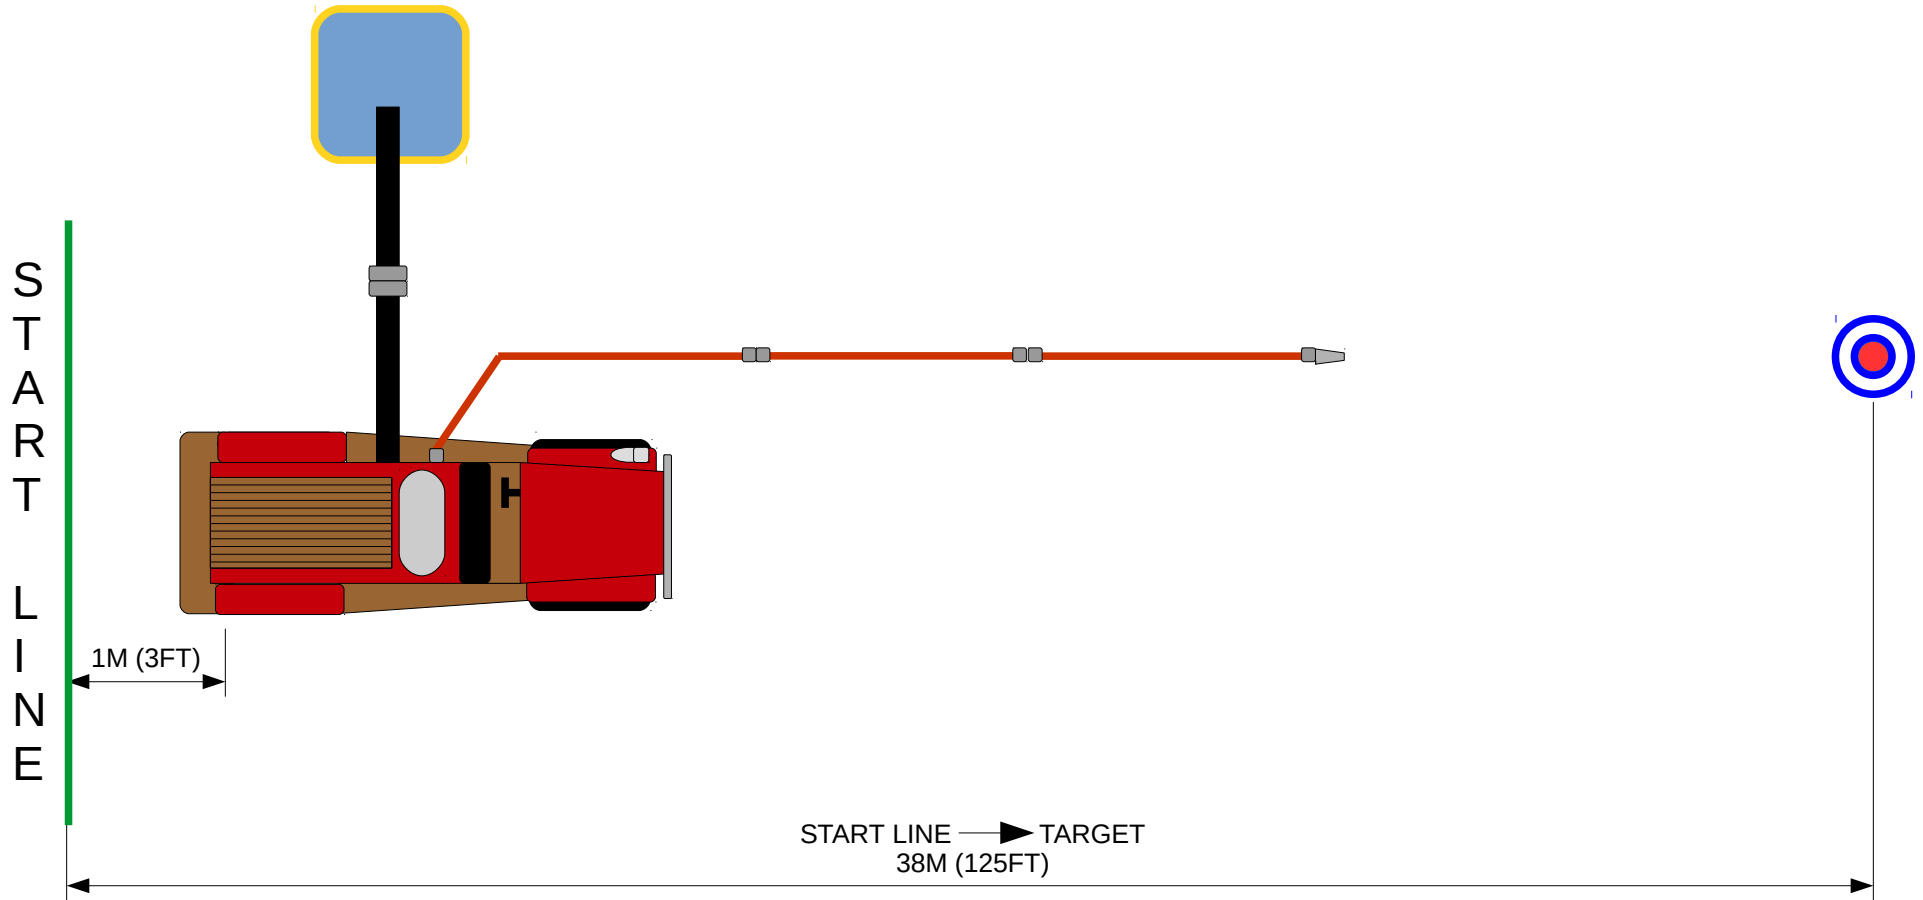

1.4.2. FAST WATER PUMPING – MOTORIZED:

1.4.2.1. Classification of vehicles shall be as follows:

1.4.2.1.(i) Rotary

1.4.2.1.(ii) Piston

1.4.2.1.(iii) Centrifugal

1.4.2.2. Each apparatus shall be tested individually against a stop watch.

1.4.3.3. MAXIMUM NUMBER OF CONTESTANTS SHALL BE:

1.4.2.3. Maximum number of contestants shall be five (5).

1.4.2.4. CLOTHING SHALL CONSIST OF:

1.4.2.4.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.4.2.4.(ii) Head Protection – Approved Firefighting Helmet.

1.4.2.4.(iii) Gloves shall be optional.

1.4.2.4.(iv) Use of face shields shall be optional..

1.4.2.5. EQUIPMENT SHALL CONSIST OF:

1.4.2.5.(i) Two (2) lengths of hard suction hose with a minimum diameter of 65 mm (2 ½ in.)

1.4.2.6. Truck to be located at water source with hard suction and screen connected in water source.

1.4.2.7. Pump, suction and discharge to be drained and checked by judges.

1.4.2.8. CONTESTANTS SHALL:

1.4.2.8.(i) Have engine running.

1.4.2.8.(ii) Have hand brake set.

1.4.2.8.(iii) Have wheels chocked.

1.4.2.8.(iv) Have pump disengaged.

1.4.2.8.(v) Have transmission in neutral.

1.4.2.8.(vi)(a) If equipped with a centrifugal pump, have the operator seated in the driver's seat with both hands on the steering wheel and both feet flat on the floor not touching the pedals.

(b) If equipped with a rotary pump, have the operator standing on the ground outside the driver's door with the door open and both hands at his sides.

1.4.2.8.(vii) At the signal, engage transmission and pump, prime the pump and flow water.

1.4.2.8.(viii) Knock down the target.

1.4.2.9. Time shall run from the start signal until the target is knocked down.

1.4.2.10. Each team shall be given a second chance if they wish, however, the best time shall be used.

1.4.2.11. A penalty of five (5) seconds shall be incurred for each of the following infractions:

1.4.2.11.(i) Both feet are not flat on the floor.

1.4.2.11.(ii) Both hands are not on the steering wheel.

1.4.2.11.(iii) Turnout gear is not fastened properly.


1.4.2.11.(iv) Target is not knocked down within two (2) minutes of the start signal.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT MINI MUSTER TRUCK EFFICIENCY RACE

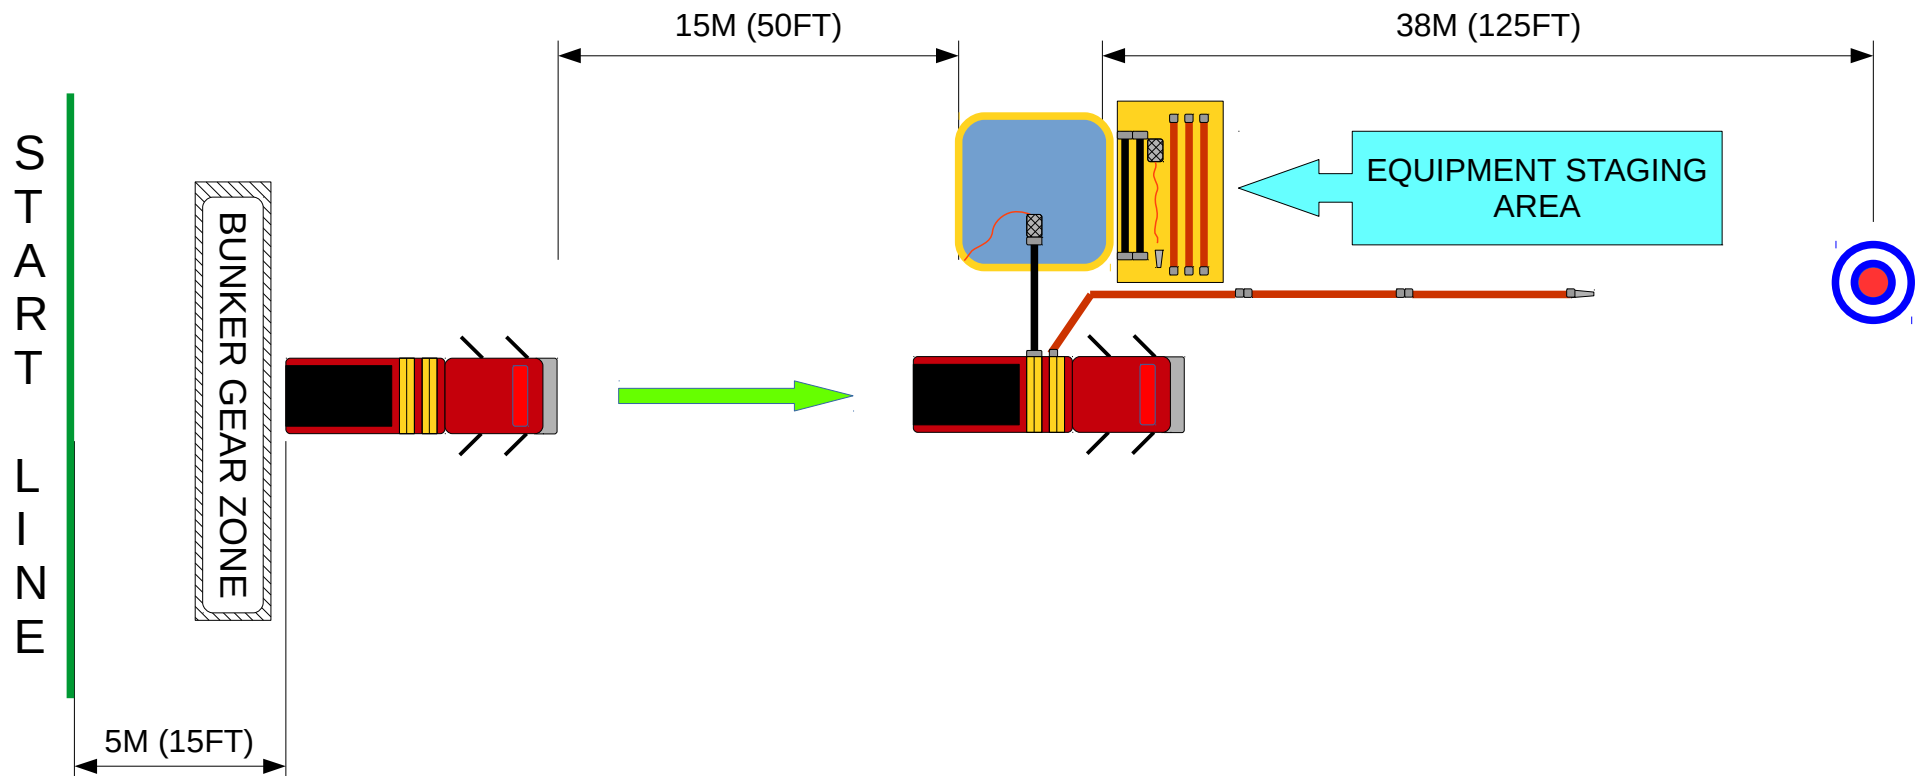

1.4.1. TRUCK EFFICIENCY

1.4.1.1. Maximum number of competitors shall be five (5).

1.4.1.2. CLOTHING SHALL CONSIST OF:

1.4.1.2.(i) Approved Structural Firefighting Bunker style Pants, Coat and Boots.

1.4.1.2.(ii) Head Protection – Approved Firefighting Helmet.

1.4.1.2.(iii) Gloves shall be optional.

1.4.1.2.(iv) Use of face shields shall be optional.

1.4.1.3. EQUIPMENT SHALL CONSIST OF:

1.4.1.3.(i) Two (2) wheel chocks.

1.4.1.3.(ii) Minimum of one length of hard suction hose as supplied as original equipment.

1.4.1.3.(iii) Suction screen.

1.4.1.4. CONTESTANTS SHALL:

1.4.1.4.(i) Proceed to turnout gear and dress properly.

1.4.1.4.(ii) Board pumper.

1.4.1.4.(ii) Move pumper to water source under its own power.

1.4.1.4.(iv) Hook up necessary lines.

1.4.1.4.(v) Obtain water.

1.4.1.4.(vi) Knock down target with solid stream from straight bore nozzle.

1.4.1.4.(vii) Must have two (2) men on the nozzle.

1.4.1.7. DISQUALIFICATION SHALL OCCUR FOR THE FOLLOWING:

1.4.1.7.(i) Tank to pump valve is open

1.4.1.7.(ii) Pump is not drained prior to start.


1.4.1.7.(iii) Target is not knocked down within three (3) minutes after the first discharge of water.

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT PUMPER PULL

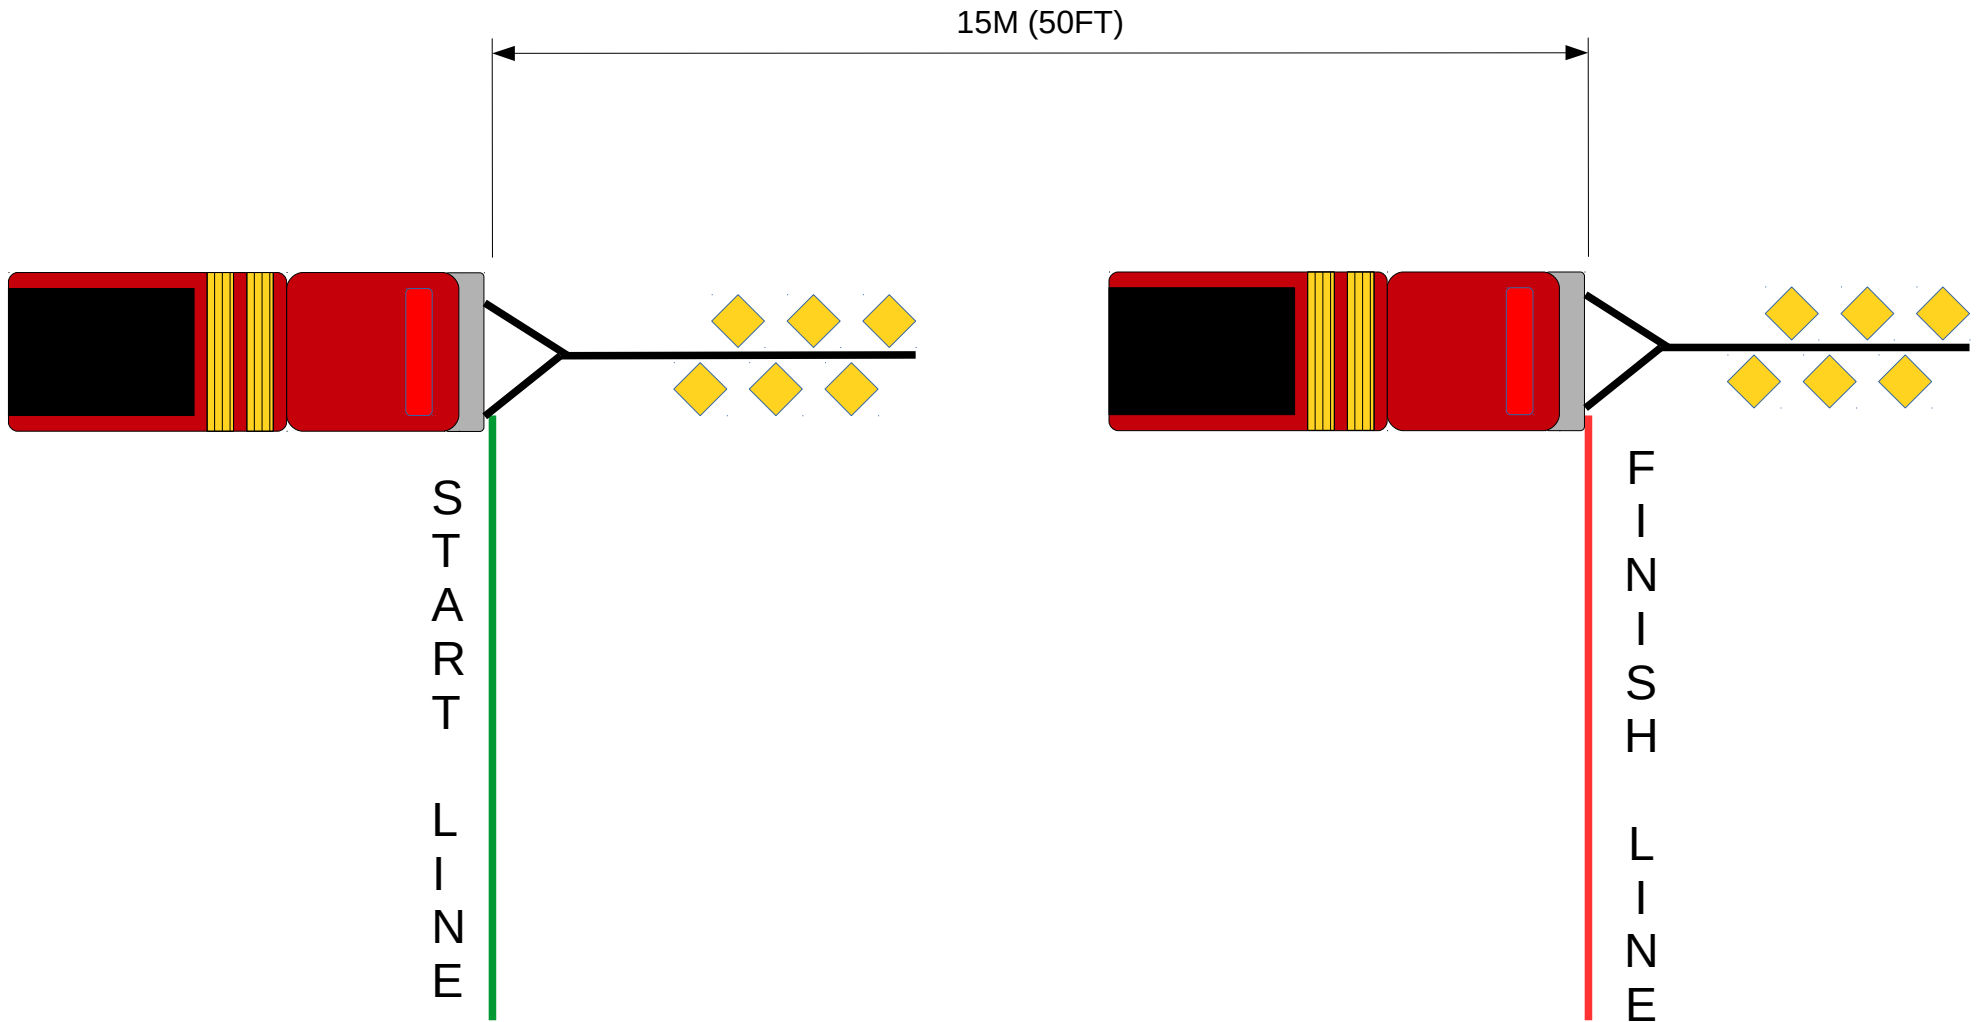

PUMPER PULL

- Maximum number of competitors shall be six (6)

CLOTHING SHALL CONSIST OF:

- Full running style shoes with laces or Velcro fasteners done up.
- Street clothes.
- Disqualification shall occur if a competitor wears spikes of any kind.

RUNNING OF THE EVENT:


- Have transmission in neutral.
- At judges signal, stopwatch will begin
- When front bumper crosses the 50ft mark time stops
- Fastest time will be declared winner
- In the event of a tie, both teams will do a pull off

1.3.1.17. Only the team captain shall converse with the judges in the event of a dispute.



FIRE FIGHTERS' ASSOCIATION OF ONTARIO

FIELD LAYOUT FIREFIGHTER GAUNTLET COURSE

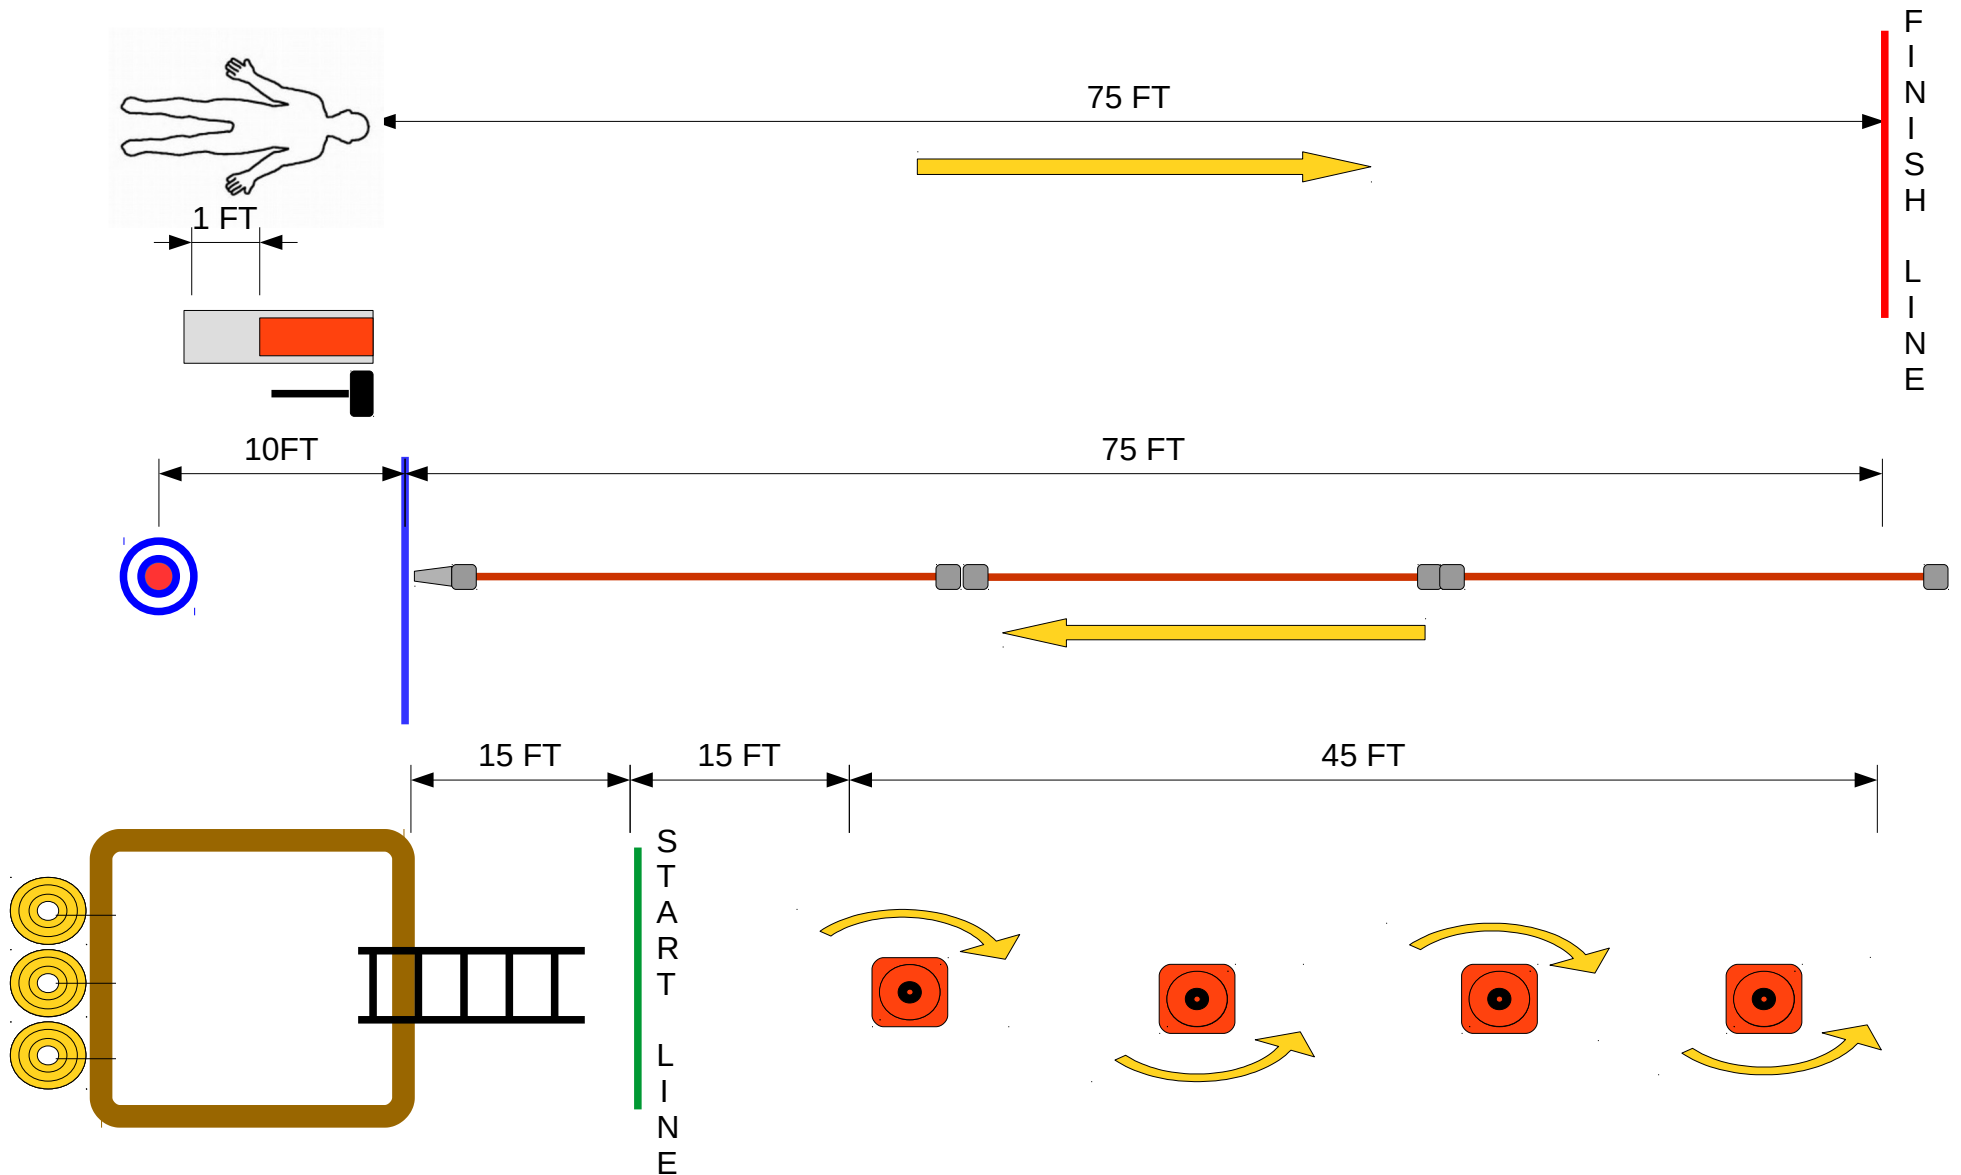

FIREFIGHTER GAUNTLET COURSE
INDIVIDUAL COMPETITION

CLOTHING SHALL CONSIST OF:

Approved Structural Firefighting Bunker style Pants, Coat, Boots, Gloves, SCBA and Facepiece
Head Protection – Approved Firefighting Helmet.
Use of face shields shall be optional.

EQUIPMENT SHALL CONSIST OF:

Platform and Ladder
3 Rolls of 1 ½ (35mm) Hose and Rope
4 Pylons
3 Lengths of Charged 1 ½ (35mm) Hose
1 Target
Hammer Station with Deadblow Hammer
Rescue Mannequin

RUNNING THE EVENT:

Climb ladder and raise 3 rolls of 1 ½ (35mm) hose
Descend ladder
Proceed through pylon section
Advance 1 ½ (35mm) charged hose line 75ft and knockdown target
Proceed to hammer station and advance weight 12" (no hooking or pulling the weight allowed)
Proceed to rescue station and drag mannequin walking backwards 75 ft to finish line
Time stops when firefighter crosses finish line

(10 second) PENALTIES SHALL OCCUR FOR THE FOLLOWING:

Firefighter jumps rungs on ladder climb and descent
Firefighter does not weave around all pylons
Firefighter knocks down target before 75 ft mark
Firefighter fails to close nozzle after knocking down target
Firefighter hooks or pull weight with hammer at hammer station

Only the competitor shall converse with the judges in the event of a dispute.